

**SPOJKE DN 7,2 TIP 26KA - ES**  
**COUPLINGS DN 7,2 TYPE 26KA - ES**



**Delovni tlak**  
**Working pressure**


PN=35 bar, maksimalni delovni statični pritisk z varnostnim faktorjem od 4 do 1  
 PN=35 bar, maximum static working pressure with safety factor of 4 to 1

**Delovna temperatura**  
**Working temperature**

-20°C +100°C (NBR) standard  
 Odvisno od medija.  
 Depending on the medium.

\*ostala tesnila (EPDM, FKM) kot opcija za doplačilo / other seals upon surcharge

**Pretok / Flow capacity** 1000 L/min

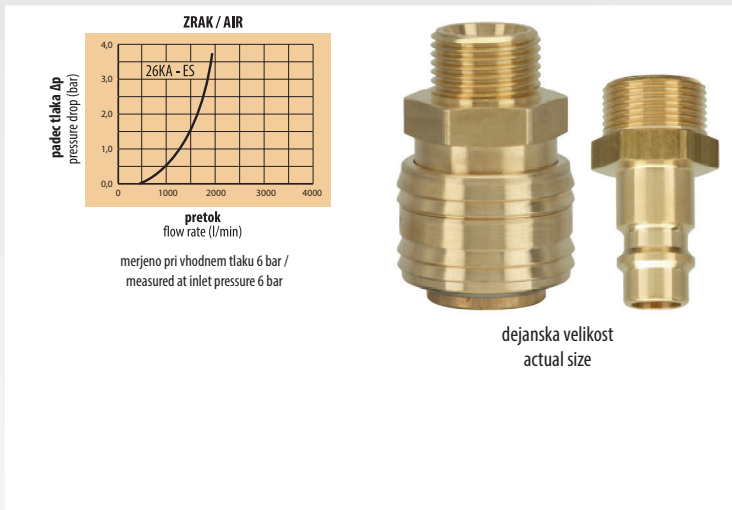


Spojka / Coupling	Standard / Standard (MS)	Opcija / Option (MS-N)	
Ohišje / Back body	Medenina / Brass MS58	Medenina-niklano / Brass-nickel plated MS58	
Ohišje ventila / Valve body	Medenina / Brass MS58	Medenina-niklano / Brass-nickel plated MS58	
Drsni obroč / Sleeve	Medenina / Brass MS58	Medenina-niklano / Brass-nickel plated MS58	
Ventil / Valve	Medenina / Brass MS58	Medenina-niklano / Brass-nickel plated MS58	
Vzmet in vskočni obroč / Spring and Locking ring	AISI 301	AISI 301	
Zaporni zatič / Locking pins	AISI 301	AISI 301	
Tesnila / Seals	NBR	NBR	
Vtikač / Plug	Standard / Standard (MS)	Opcija 1 / Option 1 (MS-N)	Opcija 2 / Option 2 (ST-Z)
Vtikač / Plug profile	Medenina / Brass MS58	Medenina-niklano / Brass-nickel plated MS58	Jeklo-cinkano / Steel-zinc plated and yellow passivated

TL = dolžina navoja/thread length, SL = dolžina nastavka/stem length


**SPOJKE / COUPLINGS**

TIP-zunanji navoj TYPE-male thread	A (mm)	Hex SW	Hex1 SW1	L (mm)	TL (mm)	SL (mm)	D (mm)	B (mm)	G (mm)
KD 1/8 A TIP 26KA - ES SPOJKA MS	G1/8	22		38	7		27		
KD 1/8 A TIP 26KA - ES SPOJKA MS-N	G1/8	22		38	7		27		
KD 1/4 A TIP 26KA - ES SPOJKA MS	G1/4	22		40	9		27		
KD 1/4 A TIP 26KA - ES SPOJKA MS-N	G1/4	22		40	9		27		
KD 3/8 A TIP 26KA - ES SPOJKA MS	G3/8	22		41	9		27		
KD 3/8 A TIP 26KA - ES SPOJKA MS-N	G3/8	22		41	9		27		
KD 1/2 A TIP 26KA - ES SPOJKA MS	G1/2	24		41	10		27		
KD 1/2 A TIP 26KA - ES SPOJKA MS-N	G1/2	24		41	10		27		
KD M14x1.5 A TIP 26KA - ES SPOJKA MS	M14x1.5	22		40	9		27		
KD M14x1.5 A TIP 26KA - ES SPOJKA MS-N	M14x1.5	22		40	9		27		
KD M16x1.5 A TIP 26KA - ES SPOJKA MS	M16x1.5	22		40	9		27		
KD M16x1.5 A TIP 26KA - ES SPOJKA MS-N	M16x1.5	22		40	9		27		
KD M18x1.5 A TIP 26KA - ES SPOJKA MS	M18x1.5	22		40	10		27		
KD M18x1.5 A TIP 26KA - ES SPOJKA MS-N	M18x1.5	22		40	10		27		
TIP-zunanji navoj - LOCTITE laminirano TYPE-male thread - LOCTITE laminated	A (mm)	Hex SW	Hex1 SW1	L (mm)	TL (mm)	SL (mm)	D (mm)	B (mm)	G (mm)
KD 1/4 A TIP 26KA - ES SPOJKA MS	R1/4	22		42	11		27		
KD 3/8 A TIP 26KA - ES SPOJKA MS	R3/8	22		44	12		27		
KD 1/2 A TIP 26KA - ES SPOJKA MS	G1/2	22		45	15		27		




SPOJKE ZA INDUSTRIJO IN OBRT /  
 INDUSTRIAL COUPLINGS


TIP-notranji navoj TYPE-female thread	A (mm)	Hex SW	Hex1 SW1	L (mm)	TL (mm)	SL (mm)	D (mm)	B (mm)	G (mm)
KD 1/8 I TIP 26KA - ES SPOJKA MS	G1/8	22		39	9		27		
KD 1/8 I TIP 26KA - ES SPOJKA MS-N	G1/8	22		39	9		27		
KD 1/4 I TIP 26KA - ES SPOJKA MS	G1/4	22		41	10.5		27		
KD 1/4 I TIP 26KA - ES SPOJKA MS-N	G1/4	22		41	10.5		27		
KD 3/8 I TIP 26KA - ES SPOJKA MS	G3/8	22		41	10.5		27		
KD 3/8 I TIP 26KA - ES SPOJKA MS-N	G3/8	22		41	10.5		27		
KD 1/2 I TIP 26KA - ES SPOJKA MS	G1/2	24		42.5	12		27		
KD 1/2 I TIP 26KA - ES SPOJKA MS-N	G1/2	24		42.5	12		27		
KD 3/4 I TIP 26KA - ES SPOJKA MS	G3/4	32		42.5	13		34		
KD 3/4 I TIP 26KA - ES SPOJKA MS-N	G3/4	32		42.5	13		34		
KD M14X1.5 I TIP 26KA - ES SPOJKA MS	M14X1.5	22		41.5	11		27		
KD M14X1.5 I TIP 26KA - ES SPOJKA MS-N	M14X1.5	22		41.5	11		27		
KD M16X1.5 I TIP 26KA - ES SPOJKA MS	M16X1.5	22		41.5	11		27		
KD M16X1.5 I TIP 26KA - ES SPOJKA MS-N	M16X1.5	22		41.5	11		27		
KD M18X1.5 I TIP 26KA - ES SPOJKA MS	M18X1.5	22		41.5	12		27		
KD M18X1.5 I TIP 26KA - ES SPOJKA MS-N	M18X1.5	22		41.5	12		27		




TIP-natični priključek TYPE-hose barb	A (mm)	Hex SW	Hex1 SW1	L (mm)	TL (mm)	SL (mm)	D (mm)	B (mm)	G (mm)
KD P6 TIP 26KA - ES SPOJKA MS	6			55		25	27		
KD P6 TIP 26KA - ES SPOJKA MS-N	6			55		25	27		
KD P8 TIP 26KA - ES SPOJKA MS	8			55		25	27		
KD P8 TIP 26KA - ES SPOJKA MS-N	8			55		25	27		
KD P9 TIP 26KA - ES SPOJKA MS	9			55		25	27		
KD P9 TIP 26KA - ES SPOJKA MS-N	9			55		25	27		
KD P10 TIP 26KA - ES SPOJKA MS	10			55		25	27		
KD P10 TIP 26KA - ES SPOJKA MS-N	10			55		25	27		
KD P13 TIP 26KA - ES SPOJKA MS	13			55		25	27		
KD P13 TIP 26KA - ES SPOJKA MS-N	13			55		25	27		



TIP-priključek z matico za cev TYPE-plastic hose connection	A (mm)	Hex SW	Hex1 SW1	L (mm)	TL (mm)	SL (mm)	D (mm)	B (mm)	G (mm)
KD 46 TIP 26KA - ES SPOJKA MS	4x6	22	12	44			27		
KD 46 TIP 26KA - ES SPOJKA MS-N	4x6	22	12	44			27		
KD 68 TIP 26KA - ES SPOJKA MS	6x8	22	14	44			27		
KD 68 TIP 26KA - ES SPOJKA MS-N	6x8	22	14	44			27		
KD 810 TIP 26KA - ES SPOJKA MS	8x10	22	17	48			27		
KD 810 TIP 26KA - ES SPOJKA MS-N	8x10	22	17	48			27		
KD 912 TIP 26KA - ES SPOJKA MS	9x12	22	17	48			27		
KD 912 TIP 26KA - ES SPOJKA MS-N	9x12	22	17	48			27		




TIP-priključek z matico za cev z zaščitno špiralo TYPE-plastic hose connection with spring guard	A (mm)	Hex SW	Hex1 SW1	L (mm)	TL (mm)	SL (mm)	D (mm)	B (mm)	G (mm)
KD 46 TIP 26KA - ES SPOJKA S ŠPIRALO MS	4x6	22	12	130			27		
KD 46 TIP 26KA - ES SPOJKA S ŠPIRALO MS-N	4x6	22	12	130			27		
KD 58 TIP 26KA - ES SPOJKA S ŠPIRALO MS	5x8	22	14	130			27		
KD 68 TIP 26KA - ES SPOJKA S ŠPIRALO MS	6x8	22	14	130			27		
KD 68 TIP 26KA - ES SPOJKA S ŠPIRALO MS-N	6x8	22	14	130			27		
KD 6510 TIP 26KA - ES SPOJKA S ŠPIRALO MS	6.5x10	22	17	130			27		
KD 810 TIP 26KA - ES SPOJKA S ŠPIRALO MS	8x10	22	19	140			27		
KD 810 TIP 26KA - ES SPOJKA S ŠPIRALO MS-N	8x10	22	19	140			27		
KD 812 TIP 26KA - ES SPOJKA S ŠPIRALO MS	8x12	22	19	140			27		
KD 912 TIP 26KA - ES SPOJKA S ŠPIRALO MS	9x12	22	19	140			27		
KD 912 TIP 26KA - ES SPOJKA S ŠPIRALO MS-N	9x12	22	19	140			27		




VTIKAČI / PLUGS


TIP-zunanji navoj TYPE-male thread	A (mm)	Hex SW	Hex1 SW1	L (mm)	TL (mm)	SL (mm)	D (mm)	B (mm)	G (mm)
KS 1/8 A TIP 26SF - ES VTIKAČ MS	G1/8	13		31	7				
KS 1/8 A TIP 26SF - ES VTIKAČ MS-N	G1/8	13		31	7				
KS 1/8 A TIP 26SF - ES VTIKAČ ST-Z	G1/8	13		31	7				
KS 1/4 A TIP 26SF - ES VTIKAČ MS	G1/4	17		33	9				
KS 1/4 A TIP 26SF - ES VTIKAČ MS-N	G1/4	17		33	9				
KS 1/4 A TIP 26SF - ES VTIKAČ ST-Z	G1/4	17		33	9				
KS 3/8 A TIP 26SF - ES VTIKAČ MS	G3/8	19		33	9				
KS 3/8 A TIP 26SF - ES VTIKAČ MS-N	G3/8	19		33	9				
KS 3/8 A TIP 26SF - ES VTIKAČ ST-Z	G3/8	19		33	9				
KS 1/2 A TIP 26SF - ES VTIKAČ MS	G1/2	24		35	10				
KS 1/2 A TIP 26SF - ES VTIKAČ MS-N	G1/2	24		35	10				
KS 1/2 A TIP 26SF - ES VTIKAČ ST-Z	G1/2	24		36	10				
KS M14x1.5 A TIP 26SF - ES VTIKAČ MS	M14X1.5	17		33	9				
KS M16x1.5 A TIP 26SF - ES VTIKAČ MS	M16x1.5	19		33	9				
KS M18x1.5 A TIP 26SF - ES VTIKAČ MS	M18x1.5	22		34	10				




TIP-notranji navoj TYPE-female thread	A (mm)	Hex SW	Hex1 SW1	L (mm)	TL (mm)	SL (mm)	D (mm)	B (mm)	G (mm)
KS 1/8 I TIP SF26 - ES VTIKAČ MS	G1/8	13		31	9				
KS 1/8 I TIP SF26 - ES VTIKAČ MS-N	G1/8	13		31	9				
KS 1/8 I TIP SF26 - ES VTIKAČ ST-Z	G1/8	13		31	9				
KS 1/4 I TIP SF26 - ES VTIKAČ MS	G1/4	17		33	10				
KS 1/4 I TIP SF26 - ES VTIKAČ MS-N	G1/4	17		33	10				
KS 1/4 I TIP SF26 - ES VTIKAČ ST-Z	G1/4	17		33	10				
KS 3/8 I TIP SF26 - ES VTIKAČ MS	G3/8	19		33	10				
KS 3/8 I TIP SF26 - ES VTIKAČ MS-N	G3/8	19		33	10				
KS 3/8 I TIP SF26 - ES VTIKAČ ST-Z	G3/8	19		33	10				
KS 1/2 I TIP SF26 - ES VTIKAČ MS	G1/2	24		35	12				
KS 1/2 I TIP SF26 - ES VTIKAČ MS-N	G1/2	24		35	12				
KS 1/2 I TIP SF26 - ES VTIKAČ ST-Z	G1/2	24		35	12				
KS M14x1.5 I TIP SF26- ES VTIKAČ MS	M14X1.5	17		33	11				
KS M16x1.5 I TIP SF26 - ES VTIKAČ MS	M16x1.5	19		33	11				
KS M18x1.5 I TIP SF26 - ES VTIKAČ MS	M18x1.5	22		35	12				




TIP-natični priključek TYPE-hose barb	A (mm)	Hex SW	Hex1 SW1	L (mm)	TL (mm)	SL (mm)	D (mm)	B (mm)	G (mm)
KS P4 TIP SF26 - ES VTIKAČ MS	4	44				22.5	12		
KS P4 TIP SF26 - ES VTIKAČ MS-N	4	44				22.5	12		
KS P6 TIP SF26 - ES VTIKAČ MS	6	44				24	12		
KS P6 TIP SF26 - ES VTIKAČ MS-N	6	44				24	12		
KS P6 TIP SF26 - ES VTIKAČ ST-Z	6	44				24	12		
KS P8 TIP SF26 - ES VTIKAČ MS	8	44				24	12		
KS P8 TIP SF26 - ES VTIKAČ MS-N	8	44				24	12		
KS P8 TIP SF26 - ES VTIKAČ ST-Z	8	44				24	12		
KS P9 TIP SF26 - ES VTIKAČ MS	9	44				24	12		
KS P9 TIP SF26 - ES VTIKAČ MS-N	9	44				24	12		
KS P9 TIP SF26 - ES VTIKAČ ST-Z	9	44				24	12		
KS P10 TIP SF26 - ES VTIKAČ MS	10	44				23	12		
KS P10 TIP SF26 - ES VTIKAČ MS-N	10	44				23	12		
KS P13 TIP SF26 - ES VTIKAČ MS	13	44				23	15		
KS P13 TIP SF26 - ES VTIKAČ MS-N	13	44				23	15		
KS P13 TIP SF26 - ES VTIKAČ ST-Z	13	44				23	15		



TIP-priključek z matico za cev TYPE-plastic hose connection	A (mm)	Hex SW	Hex1 SW1	L (mm)	TL (mm)	SL (mm)	D (mm)	B (mm)	G (mm)
KD 46 TIP 26KA - ES SPOJKA MS	4x6	-	12	34					
KD 46 TIP 26KA - ES SPOJKA MS-N	4x6	-	12	34					
KD 68 TIP 26KA - ES SPOJKA MS	6x8	-	14	34					
KD 68 TIP 26KA - ES SPOJKA MS-N	6x8	-	14	34					
KD 810 TIP 26KA - ES SPOJKA MS	8x10	17	17	43					
KD 810 TIP 26KA - ES SPOJKA MS-N	8x10	17	17	43					
KD 912 TIP 26KA - ES SPOJKA MS	9x12	17	17	43					
KD 912 TIP 26KA - ES SPOJKA MS-N	9x12	17	17	43					




TIP-priključek z matico za cev z zaščitno spiralo TYPE-plastic hose connection with spring guard	A (mm)	Hex SW	Hex1 SW1	L (mm)	TL (mm)	SL (mm)	D (mm)	B (mm)	G (mm)
KS 46 TIP SF26 - ES VTIKAČ S ŠPIRALO MS	4x6	-	12	115					
KS 46 TIP SF26 - ES VTIKAČ S ŠPIRALO MS-N	4x6	-	12	115					
KS 58 TIP SF26 - ES VTIKAČ S ŠPIRALO MS	5x8	17	14	115					
KS 68 TIP SF26 - ES VTIKAČ S ŠPIRALO MS	6x8	-	14	115					
KS 68 TIP SF26 - ES VTIKAČ S ŠPIRALO MS-N	6x8	-	14	115					
KS 6510 TIP SF26 - ES VTIKAČ S ŠPIRALO MS-N	6.5x10	17	17	115					
KS 810 TIP SF26 - ES VTIKAČ S ŠPIRALO MS	8x10	17	19	132					
KS 810 TIP SF26 - ES VTIKAČ S ŠPIRALO MS-N	8x10	17	19	132					
KS 812 TIP SF26 - ES VTIKAČ S ŠPIRALO MS	8x12	17	19	132					
KS 912 TIP SF26 - ES VTIKAČ S ŠPIRALO MS	9x12	17	19	132					
KS 912 TIP SF26 - ES VTIKAČ S ŠPIRALO MS-N	9x12	17	19	132					




**SPOJKE Z NATIČNIM PRIKLJUČKOM 45° in 90° / COUPLINGS WITH STEM 45° and 90°**

TIP-natični priključek 45° TYPE-hose barb 45°	A (mm)	Hex SW	Hex1 SW1	L (mm)	TL (mm)	SL (mm)	D (mm)	B (mm)	G (mm)
KD P6 TIP 26KA - ES SPOJKA MS 45°	6			44		27	27		
KD P9 TIP 26KA - ES SPOJKA MS 45°	9			44		27	27		
KD P13 TIP 26KA - ES SPOJKA MS 45°	13			44		30	27		



TIP-natični priključek 90° TYPE-hose barb 90°	A (mm)	Hex SW	Hex1 SW1	L (mm)	TL (mm)	SL (mm)	D (mm)	B (mm)	G (mm)
KD P6 TIP 26KA - ES SPOJKA MS 90°	6			44		26	27		
KD P9 TIP 26KA - ES SPOJKA MS 90°	9			44		26	27		
KD P13 TIP 26KA - ES SPOJKA MS 90°	13			44		28	27		



## SPOJKE Z ODPRTIM PRETOKOM / COUPLINGS WITH FREE PASSAGE

Obojestransko odprta za optimalen pretok, predvsem pri aplikacijah z vodo ali drugimi tekočinami.  
2-way free passage for optimum flow capacity, particularly for the application with water or other liquids.

Delovni tlak  
Working pressure

PN=35 bar, maksimalni delovni statični pritisk z varnostnim faktorjem od 4 do 1  
PN=35 bar, maximum static working pressure with safety factor of 4 to 1


Delovna temperatura / Working temperature

-20°C +100°C (NBR) standard


Pretok / Flow capacity

1000 L/min

TIP-zunanji navoj TYPE-male thread	A (mm)	Hex SW	Hex1 SW1	L (mm)	TL (mm)	SL (mm)	D (mm)	B (mm)	G (mm)
KD 1/4 A TIP 26KF - ES SPOJKA MS	G1/4	22		40	9		27		
KD 1/4 A TIP 26KF - ES SPOJKA MS-N	G1/4	22		40	9		27		
KD 3/8 A TIP 26KF - ES SPOJKA MS	G3/8	22		41	9		27		
KD 3/8 A TIP 26KF - ES SPOJKA MS-N	G3/8	22		41	9		27		
KD 1/2 A TIP 26KF - ES SPOJKA MS	G1/2	24		41	10		27		
KD 1/2 A TIP 26KF - ES SPOJKA MS-N	G1/2	24		41	10		27		



TIP-notranji navoj TYPE-female thread	A (mm)	Hex SW	Hex1 SW1	L (mm)	TL (mm)	SL (mm)	D (mm)	B (mm)	G (mm)
KD 1/4 I TIP 26KF - ES SPOJKA MS	G1/4	22		41	10.5		27		
KD 1/4 I TIP 26KF - ES SPOJKA MS-N	G1/4	22		41	10.5		27		
KD 3/8 I TIP 26KF - ES SPOJKA MS	G3/8	22		41	10.5		27		
KD 3/8 I TIP 26KF - ES SPOJKA MS-N	G3/8	22		41	10.5		27		
KD 1/2 I TIP 26KF - ES SPOJKA MS	G1/2	24		42.5	12		27		
KD 1/2 I TIP 26KF - ES SPOJKA MS-N	G1/2	24		42.5	12		27		



TIP-natični priključek TYPE-hose barb	A (mm)	Hex SW	Hex1 SW1	L (mm)	TL (mm)	SL (mm)	D (mm)	B (mm)	G (mm)
KD P6 TIP 26KF - ES SPOJKA MS	6			55		25	27		
KD P6 TIP 26KF - ES SPOJKA MS-N	6			55		25	27		
KD P9 TIP 26KF - ES SPOJKA MS	9			55		25	27		
KD P9 TIP 26KF - ES SPOJKA MS-N	9			55		25	27		
KD P13 TIP 26KF - ES SPOJKA MS	13			55		25	27		
KD P13 TIP 26KF - ES SPOJKA MS-N	13			55		25	27		

